

— M2M Data Software User Guide —



— Login —

1. Enter new.m2mdata.co in the URL / address bar;
2. Fill in the **Login** and **Password** fields, and then click the **Login** button.




— Change Password —

1. Click on the **Avatar icon** in the upper right corner and select the **Profile** item in the drop-down list;
2. Select the **Password** tab, then fill in the fields and click the **Update** button for the changes to take effect.

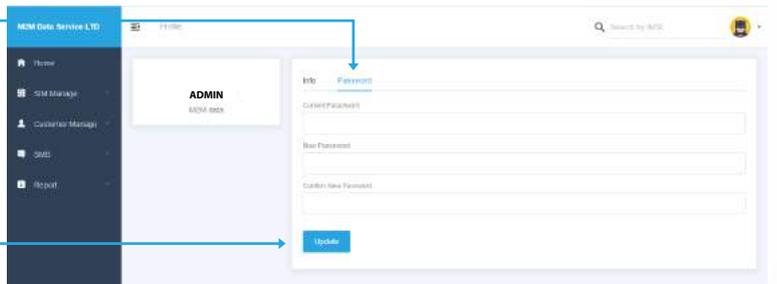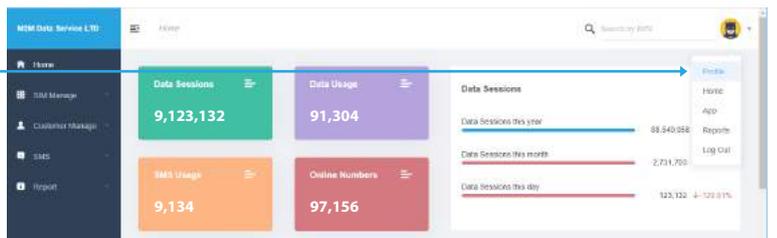

— Search SIMs —


1. On the left side of the screen, in the menu, select **SIM manage** and then the item **SIM list**;
2. Use the **Filter** on the right to find the SIM you need.

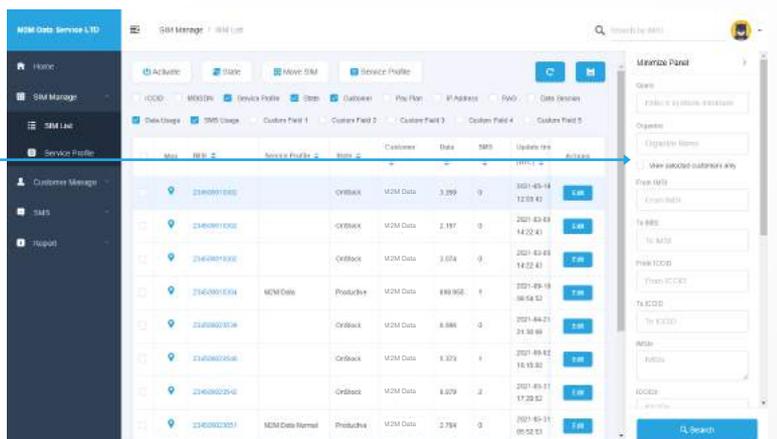

— Activate a SIM —


1. Select a SIM card by clicking on the **Checkbox** next to it;

2. Click the **Activate button**;

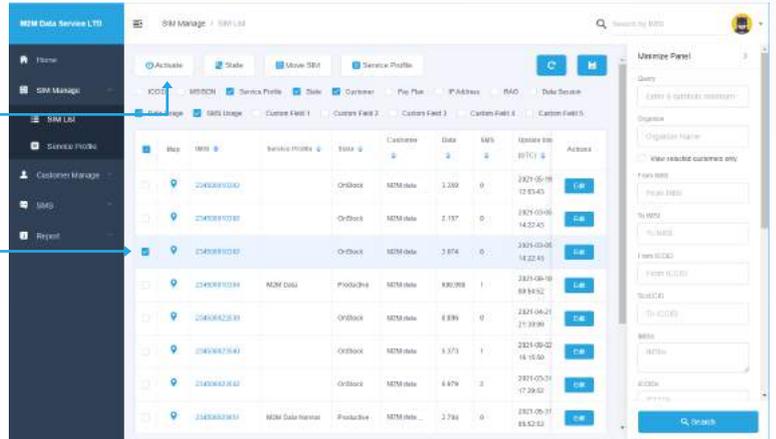

3. In the popup that appears, select **Activation status** and **Service profile**;


4. Click the **Save button**.

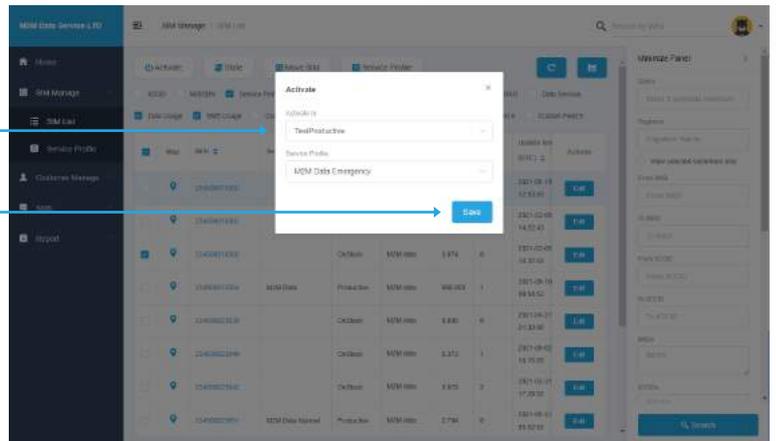


— Suspend and Terminate a SIM —

1. Select a SIM card by clicking on the **Checkbox** next to it;

2. Click the **State button**;

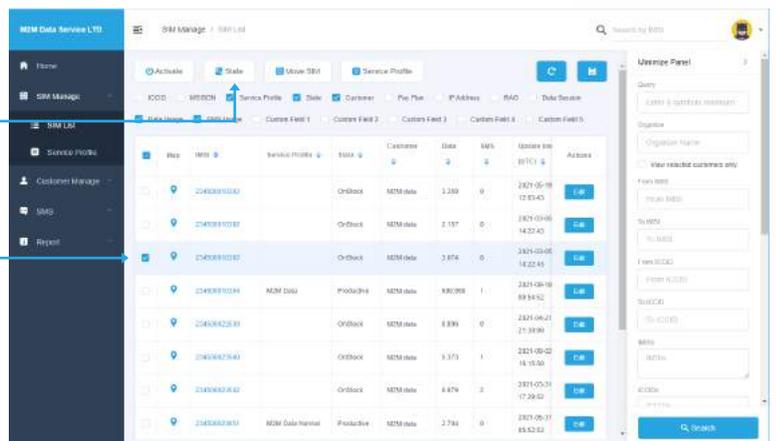


3. In the popup that appears, select **New status**.

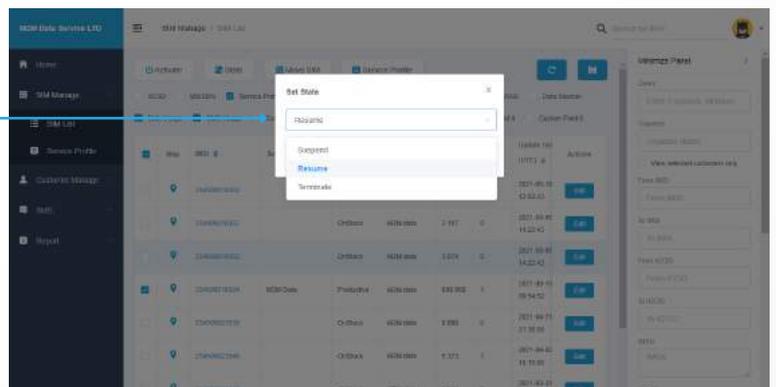


— Send Commands —


1. On the left side of the screen, in the menu, select **SMS** and then the item **Console**;
2. Use the **Search input** on the right to find the SIM you need;

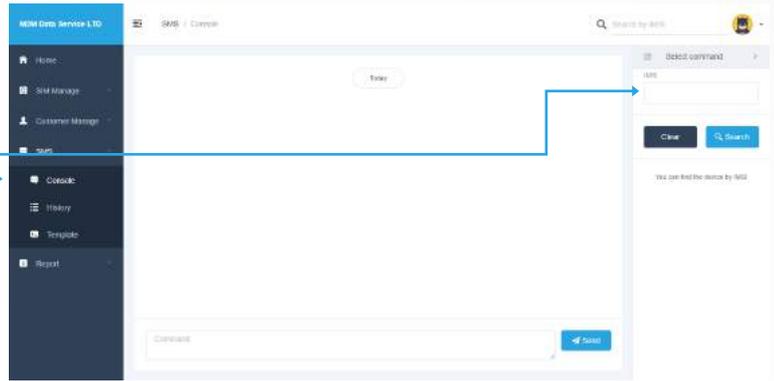

3. In the **Main part** of the screen, you will see the history of sending and receiving commands with the found SIM card. And on the right is a **List** of found SIM cards;
4. Click on the **Select command field**;

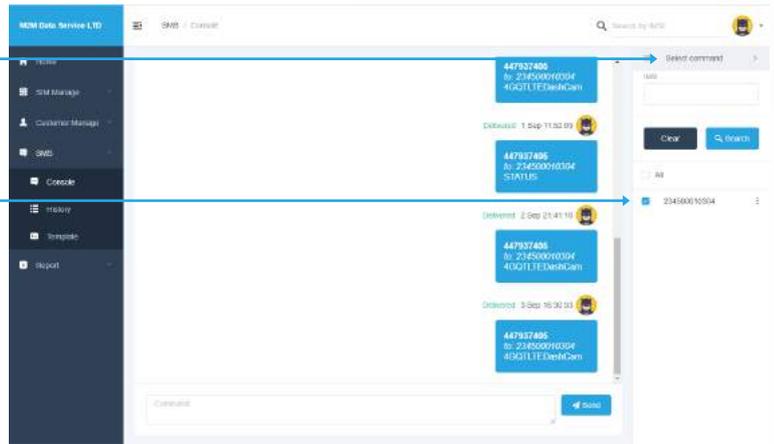


5. You will see a **List of devices**, when you click on which there will be a **List of commands** that you can send;
6. Click on the **Command** and click on the **Send button** in the chat field.

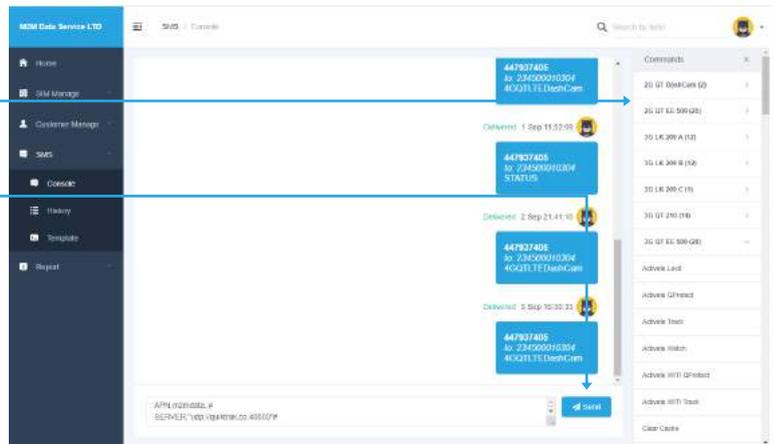

— Check Connectivity (HLR Info, Session Data) —

1. Go to the **SIM list** screen;
2. Click on the **IMSI number** of the desired SIM card;

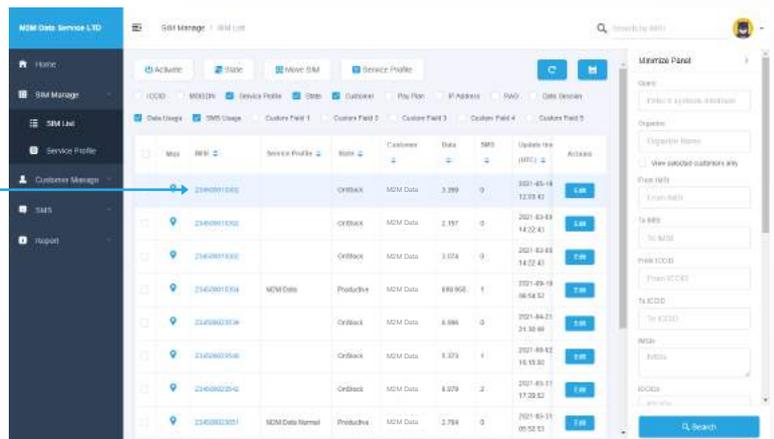

3. You will open a **Profile** with a **Dashboard** for this SIM card, where you can see all the statistical data;

4. In the **Data details** block, click on **Session data** or **HLR** to open a **Pop-up** with detailed information.

The screenshot shows the SIM Management interface for 'M2M Data Service LTD'. The top navigation bar includes 'Home', 'SIM Manage', 'SIM List', 'Service Profile', 'Customer Manage', 'SMS', and 'Report'. The main content area is titled 'Session Activity' and features four summary cards: 'Data Sessions' (97), 'Data Usage (Bytes)' (9,069,000), 'SMS Usage' (90), and 'Duration' (917,911). Below these cards is a 'Data Details' section with a 'Session Info' table and a 'Data Usage' bar chart. The 'Session Info' table includes fields like IMSI, MSISDN, and MNC. The 'Data Usage' chart shows usage over time from 2021-09-01 to 2021-09-10. A 'Pop-up' window titled 'HLR Info' is overlaid on the chart, displaying details such as 'IMSI: 0000090501', 'Date Connect To Time: 2021-09-05 05:18:34', and 'SMS Connect To Time: 2021-09-05 05:18:38'.

— Run Reports —

1. On the left side of the screen, in the menu, select **Reports** and then the item **Overview**, **Usage** or **Subscription**;

2. **The corresponding report** will open in the form of a table. On the right of the screen, you can use the **Filter** for more detailed settings.

The screenshot shows the 'Reports' section of the SIM Management interface. The left sidebar menu is expanded to show 'Reports' with sub-items: 'Overview', 'Usage', and 'Subscription'. The main content area displays a table with columns: 'IMSI', 'Customer', 'Service Profile', 'Data Usage (Bytes)', 'Data Usage (MBytes)', 'Data Usage (MBytes)', 'Data Usage (MBytes)', and 'SMS Usage'. The table contains 10 rows of data. On the right side, there is a 'Filter' section with a search bar and several checkboxes for filtering: 'All SIMs', 'M2M High', 'M2M Normal', 'M2M Low', 'All SIMs Only', and 'Custom Profile'. A 'Go' button is located at the bottom right of the filter section.